


Notes:

- a. Pulse test: $PW \leq 300 \mu s$, duty cycle $\leq 2 \%$.
- b. For DESIGN AID ONLY, not subject to production testing.
- c. Switching time is essentially independent of operating temperature.

Stresses beyond those listed under "Absolute Maximum Ratings" ma

TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

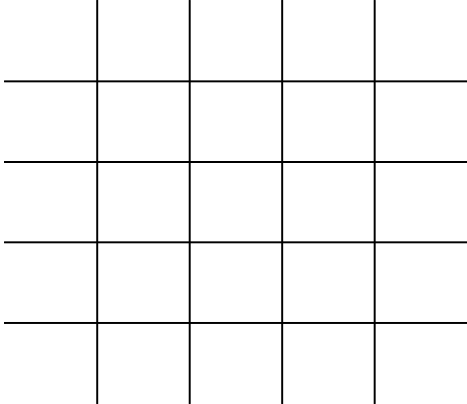

Output Characteristics

On-Resistance vs. Drain Current

Gate Charge

TYPICAL CHARACTERISTICS

SOT-23